

**PLANT LEGEND**

- TREES**
- 1 1 ACER CIRCINATUM – VINE MAPLE  
17'-8", B&B (3 STEM MINIMUM)
  - 2 1 ACER FREEMANII 'AUTUMN BLAZE' – RED MAPLE  
12" CAL., B&B, BRANCHED @ 6'
  - 3 1 CALOCEDRUS DECURRENS – INCENSE CEDAR  
110"-12", B&B, FULL PLANT, BRANCHED TO GROUND
  - 4 1 CERCIS OCCIDENTALIS – WESTERN REDBUD  
11 1/2" CAL., B&B, BRANCHED @ 6'
  - 5 1 THUJA PLICATA 'FASTIGIATA' – HOGAN CEDAR  
110"-12", B&B
  - 6 1 EXISTING TREES TO REMAIN

MATCH LINE- SHEET L1.2

- SHRUBS/GROUNDCOVER**
- 3 1 CORNUS STOLONIFERA 'BAILEY' – BAILEY DOGWOOD  
12 GAL. CONT. (SPACE AS SHOWN)
  - 4 1 MYRICA CALIFORNICA – PACIFIC WAX MYRTLE  
12 GAL. CONT. (SPACE AS SHOWN)
  - 5 1 ROSA NUTKANA – NOOTKA ROSE  
12 GAL. CONT. (SPACE AS SHOWN)
  - 6 1 VACCINIUM OVATUM – EVERGREEN HUCKLEBERRY  
12 GAL. CONT. (SPACE AS SHOWN)
  - 7 1 POUNTAIN GRASS – PENNISTETUM ALOPECUROIDES  
12 GAL. CONT. (SPACE AS SHOWN)
  - 8 1 SYMPHORICARPOS ALBUS – SNOWBERRY  
11 GAL. CONT., SPACE AS SHOWN
  - 9 1 MAHONIA AQUIFOLIUM 'COMPACTA' – COMPACT OREGON GRAPE  
12 GAL. CONT., SPACE AS SHOWN

- 1 1 WISTERIA SINENSIS – CHINESE WISTERIA  
11 GAL. CONT., SPACE AS SHOWN
- 2 1 ARCHTOSTAPHYLOS UVA URSI  
4" POTS, 18" O.C.
- 3 1 CAREX OBNUPA – SLOUGH SEDGE  
11 GAL. CONT., 2" O.C., MULCH W/ 2" LAYER OF 1"-2" ROUND RIVER ROCK
- 4 1 CLEMATIS TERNIFLORA – SWEET AUTUMN CLEMATIS  
11 GAL. CONT., SPACE AS SHOWN
- 5 1 CORNUS STOLONIFERA 'KELSEYII' – DWARF REDTWIG DOGWOOD  
12 GAL. CONT., 2" O.C.
- 6 1 DESCHAMPSIA CAESPITOSA – TUFTED HAIR GRASS  
11 GAL. CONT., 1" O.C., MULCH W/ 2" LAYER OF 1"-2" ROUND RIVER ROCK
- 7 1 FRAGARIA CHILOENSIS – WILD STRAWBERRY  
4" POTS, 18" O.C.
- 8 1 GAILTHERIA SHALLOON – SALAL  
11 GAL. CONT., 2.0' O.C.
- 9 1 JUNCUS EFFUSUS – COMMON RUSH  
4" POTS, 2" O.C., MULCH W/ 2" LAYER OF 1"-2" ROUND RIVER ROCK
- 10 1 MAHONIA REPENS – CREEPING MAHONIA  
11 GAL. CONT., 2.0' O.C.
- 11 1 POLYSTICHUM MUNITUM – SWORD FERN  
11 GAL. CONT., 2.0' O.C.


**1 TRELLIS-ENLARGEMENT**  
PLAN: 1/8"=1'-0"

- 1 HEDGEROW MIX – 1 GAL. CONT., 3' O.C.  
140% – ROSA NOOTKA – NOOTKA ROSE  
40% – CORNUS STOLONIFERA – REDTWIG DOGWOOD  
20% – SYMPHORICARPOS ALBUS – SNOWBERRY
- 2 MEADOW FIELD GRASS MIX – SUNMARK SEEDS (503) 241-7333  
33% MEADOW BROME BROMUS COMMUTATUS  
20% SHEEP FESCUE FESTUCA OVINA  
15% TUFTED HAIRGRASS DESCHAMPSIA CAESPITOSA  
15% WILD IRIS IRIS MISSOURIENSIS  
10% PRAIRIE JUNE GRASS KOELERIA MACRANTHA  
4% BLUE SAGE SALVIA FARINACEA  
3% SICKLEKEELED LUPINE LUPINUS ALBICAULIS

**GENERAL NOTES:**

1. CONTRACTOR SHALL PROVIDE TOPSOIL, SOIL AMENDMENTS, AND MULCH AS SPECIFIED.
2. ALL PLANTS SHALL BE INSTALLED IN ACCORDANCE WITH THE DETAILS AND SPECIFICATIONS PROVIDED AS PART OF THE CONSTRUCTION DOCUMENT PACKAGE.
3. CONTRACTOR SHALL PROVIDE DESIGN/BUILD AUTOMATIC, UNDERGROUND IRRIGATION SYSTEM PER SPECIFICATIONS AND DETAILS ON L1.2 AND L1.4

**LEGEND:**

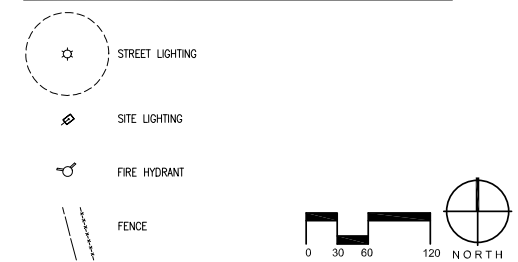


NO.	DATE	BY	APPD.	REVISIONS
E	8/14/07	RC	MF	*Confirmed - Issues For Permit
D	4/3/07	RC	MF	*Confirmed - Issues For Permit
RC	DESIGNED	11/06	DATE	
TS	DRAWN	11/06	DATE	
RC	CHECKED	04/03/07	DATE	
MF	APPROVED	04/03/07	DATE	

**EXISTING FOR REFERENCE ONLY**



**URS**  
111 S.W. Columbia, Suite 1500  
Portland, Oregon 97201  
(tel) 503-222-7200  
(fax) 503-222-4282



**CITY OF SANDY**  
PUBLIC WORKS AND TRANSIT OPERATIONS FACILITY  
PLANTING PLAN (1 OF 2)  
PHASE ONE

SUBMITTED:	DATE:	FEBRUARY 2, 2007	APPROVED:	DATE:	SCALE:	1"=60'	DRAWING NO.:	L1.1	CONTRACT NO.:	SHEET NO.:
------------	-------	------------------	-----------	-------	--------	--------	--------------	------	---------------	------------

